

V-BOX MARK-II

STEREO PASSIVE DIRECT BOX

DESCRIPTIONS

The V-Box Mark-II Stereo Passive Direct Box Is a high performance passive direct box for live concert touring and professional studio recording applications, featuring a VL transformer for exceptional audio performance.

FEATURE

- Stereo passive direct box designed for active instruments.
- Eliminates hum and buzz from ground loops.
- VL Transformers provide exceptionally linear response.

SPECIFICATIONS

Audio circuit type	Passive, Transformer based
Transformer	VL Transformer
Number of Channels	Stereo(Dual Mono)
Frequency response	20Hz-20kHz
Dynamic range	135dB
Total harmonic distortion	0.002% @1k, +4dBu
Phase deviation	-0.17° @20Hz, -0.56° @100Hz
Input impedance	140kΩ Unbalanced
Output impedance	600Ω Balanced
Maximum input	+21dBu @20Hz - 20kHz (With Pad)

FEATURES

Ground lift	Yes
Input connectors	4 TS 1/4" (2 Thru)
Output connectors	2 XLR Male outputs

GENERAL



Conditions	For use in dry locations only
Warranty	1 Year

SIZE

Height	48mm
Width	83mm
Depth	120mm
Weight	0.38kg

SHIPPING INFORMATION

Package height	54mm
Package width	98mm
Package depth	135mm
Package weight	0.47kg

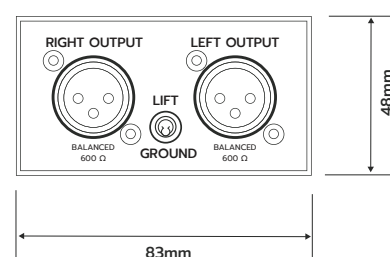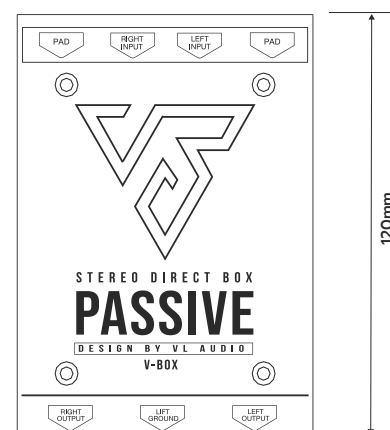

V-BOX MARK-II : STEREO PASSIVE GRAPHS

